



USER MANUAL

XOSS VORTEX

- English -

Product Introduction

Thank you for choosing XOSS VORTEX

By installing it correctly on the left crank or front hub position, it can accurately measure the cadence or speed data, and support standard ANT+ and Bluetooth protocols. Connecting to APP, Cycling computer or other devices that support Bluetooth and ANT+ protocols can help you Carry out scientific riding training.

Product Accessories

XOSS VORTEX	×1
Rubber Mat (flat, curved)	×2
Rubber Band (large, small)	×2
CR2032 Battery (installed)	×1
User Manual	×1



XOSS VORTEX



Rubber Mat
(flat, curved)



Rubber Band
(large, small)




User Manual

- 1 -

Quick Setup

Note: Remove the insulation sheet before use

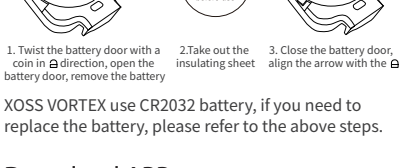

1. Twist the battery door with a coin in ⚙ direction, open the battery door, remove the battery

2. Take out the insulating sheet

3. Close the battery door, align the arrow with the ⚙

XOSS VORTEX use CR2032 battery, if you need to replace the battery, please refer to the above steps.


Download APP

XOSS VORTEX has two working modes: speed and cadence, you can switch modes by XOSS APP.

Scan the QR code on the right to download the XOSS APP.




XOSS APP



QR code


- 2 -

SPEED/CADENCE MODE SWITCH



After connecting to the XOSS APP, you can switch modes, check the battery level, and upgrade the firmware.

After the product successfully switches the mode, it will flash the LED to indicate the working mode.



Current mode Indicator

If the battery is fully charged, flash the white LED, and if the battery is low, flash the red LED.

- 3 -

Installation

Note: The rubber ring and rubber pad can be selected according to the actual situation.

SPEED MODE


Buckle the curved rubber mat onto the back of the sensor, then bind the sensor with the large rubber band onto the wheel axle.



CADENCE MODE

Buckle the flat rubber mat onto the back of the sensor, then bind the sensor with the small rubber band onto the pedal crank.

Note: It is necessary to confirm whether the gap between the crank and the frame meets the installation requirements before installation.

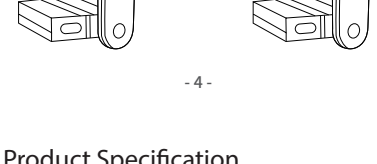

- 4 -

Product Specification

Battery: CR2032
Sensor size: 40 x 30 x 10.7 mm
Sensor weight: 10 g
Battery life: over 300hour
Waterproof grade: IP67
Working temperature: -20°C ~ 50°C
Wireless: ANT+, Bluetooth

WARRANTY

Thank you for purchasing our product, It has a one-year free warranty from the date of purchase, contact your original dealer for warranty service.

The following conditions are not covered by the warranty:

1. The normal aging loss of the battery.
2. Damage and loss of products due to improper installation.

3. Damage caused by abnormal use, such as high temperature, water damage etc.

4. Damage caused by dismantling by yourself or by unauthorized maintenance personnel.

XOSS HONG KONG CO., LIMITED
ROOMS 1318-9, HOLLYWOOD PLAZA, 610 NATHAN ROAD,
MONGKOK, KL, HONG KONG

Any questions or more information, please contact us via support@xoss.co

Visit our website for more products xoss.co

- 5 -